



## UNIT PARTITIONS

# WALLS

Our walls are used for corridors, as a linking section between door frames and for the inside of a unit. These high-tensile and corrosion-resistant walls are made up of Corridor Panels, Internal Panels and Zinc or White Channels.

### SPECIFICATION

Sizes come as standard.  
Custom designs are available upon request.

### CORRIDOR PANELS

Height:	500mm - 3000mm
Width:	500mm
Thickness:	Profiled: 0.55mm Flat: 0.7mm
Profile Depth:	30mm
Material:	GS500 Steel
Connection:	Tek Screw
Configuration:	Profiled or Flat Wall
Finishing:	Gloss white
Colours:	White

### INTERNAL PANELS

Height:	500mm - 3000mm
Width:	750mm
Thickness:	0.35mm
Profile Depth:	30mm
Material:	GS550 High Tensile Steel
Connection:	Interlocking System
Configuration:	Corrugated
Finishing:	Zincalume 150
Colours:	Zinc

### CHANNELS


Height:	25mm
Width:	30mm
Length:	3000mm
Thickness:	0.9mm
Material:	GS550 High Tensile Steel
Connection:	Tek Screw (timber floor) Hammerdrill (concrete floor)
Finishing:	Zincalume 150 and Gloss White
Colours:	Zinc or White

## ACCREDITATION

ISO 9001, ISO14001 & AEO accredited.



Profiled Walls

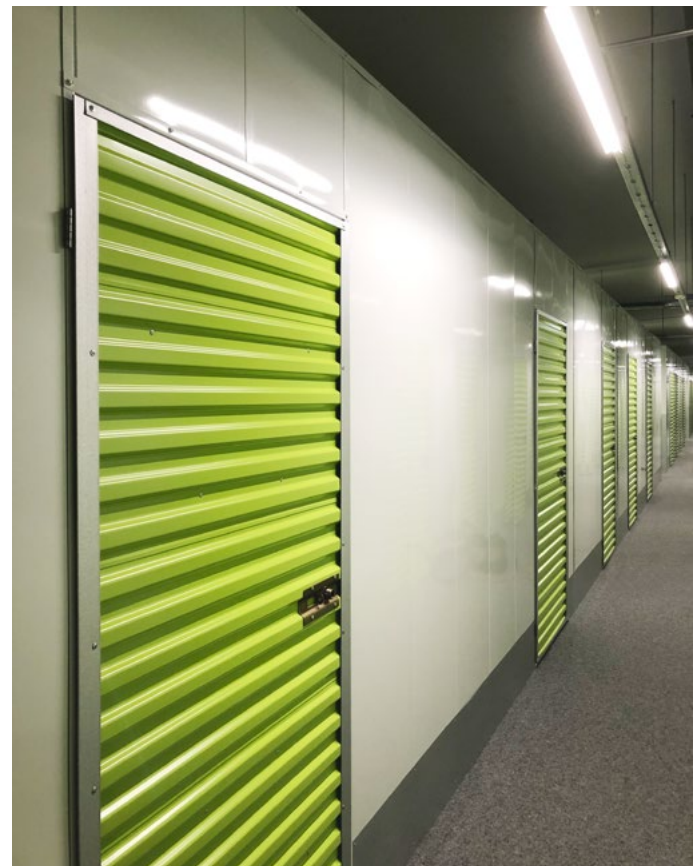

Flat Walls

### FEATURES & BENEFITS

- Extensive product warranty
- High-tensile making them dent-resistant
- Quick installation
- High-quality and durable materials
- Manufactured in-house
- Eliminate exposed edges and screws
- High-gloss finish, reflect light
- Modular design
- This product is scalable and can be cut to size on site

Learn more about the full product range by [downloading our brochure](#)

